


B DETAIL

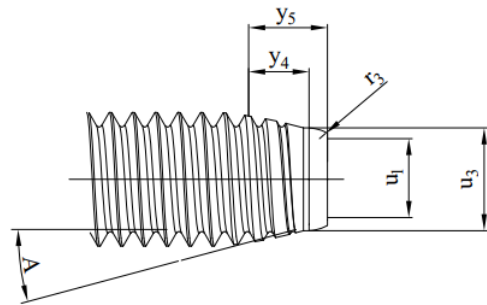

All dimensions are in millimeters.

Thread		M5	M6	M8	M10	M12	M14	M16
Pitch		0.80	1.00	1.25	1.50	1.75	2.00	2.00
u ₁	max.	3.40	4.10	5.40	6.85	8.25	9.70	11.60
	min.	3.30	4.00	5.30	6.65	8.05	9.40	11.30
u ₃	max.	3.90	4.60	6.15	7.85	9.45	11.00	12.90
	min.	3.75	4.45	6.00	7.60	9.20	10.80	12.70
r ₃	ref.	1.45	1.75	2.20	2.75	3.25	3.90	4.40
y ₄	min.	1.95	2.40	3.30	3.70	4.65	5.20	5.30
y ₅	max.	3.20	3.85	5.00	5.90	7.20	8.15	8.50
A	max.	13°	13°	13°	13°	13°	13°	13°
	min.	10°	10°	10°	10°	10°	10°	10°

Notes:

- 1- Threads shall comply with DIN ISO 261 and ISO 965-2 standards.
- 2- For any characteristics not explicitly defined in this document, reference shall be made to DIN ISO 261 and ISO 965-2 and the international standards referenced therein.
- 3- For special request, please contact us at RD@normfasteners.com